TOTO

TOILETS

NEOREST RS
Luxurious Smart Toilet

CS921VT / TCF83410GAA

Features

- New TORNADO FLUSH uses less water to produce powerful streams of water that travels along a hairpin curve of new RIMLESS DESIGN bowl creating a 360 degree of cleaning power that washes every spot
- PREMIST, a fine spray of mist making it difficult for dirt to adhere
- EWATER+ keeps toilet bowl and nozzle clean by preventing bacterial with sanitizing effect
- Automatic operation: Lid opens, closes and toilet flushes when sensor is activated
- HEATED SEAT with temperature control
- Auto powerful DEODORIZER activates after every usage
- Adjustable WARM AIR DRYING
- Hybrid Ecology System - WATER SAVING

Specifications

Flush system:	TORNADO FLUSH
Water Use:	3.8L / 3.0L
Rough-in:	305 mm
Bowl Shape:	Elongated
Water Pressure:	0.05MPa~0.75MPa
Power Rating:	220~240V, 50/60Hz, 843~852W
Length of Power Cord:	1.2 m
Material:	Bowl -Vitreous China Seat & Cover -Plastic Remote Controller -Aluminium
Size:	386Wx690Dx515H mm

reddot winner 2022

GOOD DESIGN GREEN GOOD DESIGN AWARD 2023

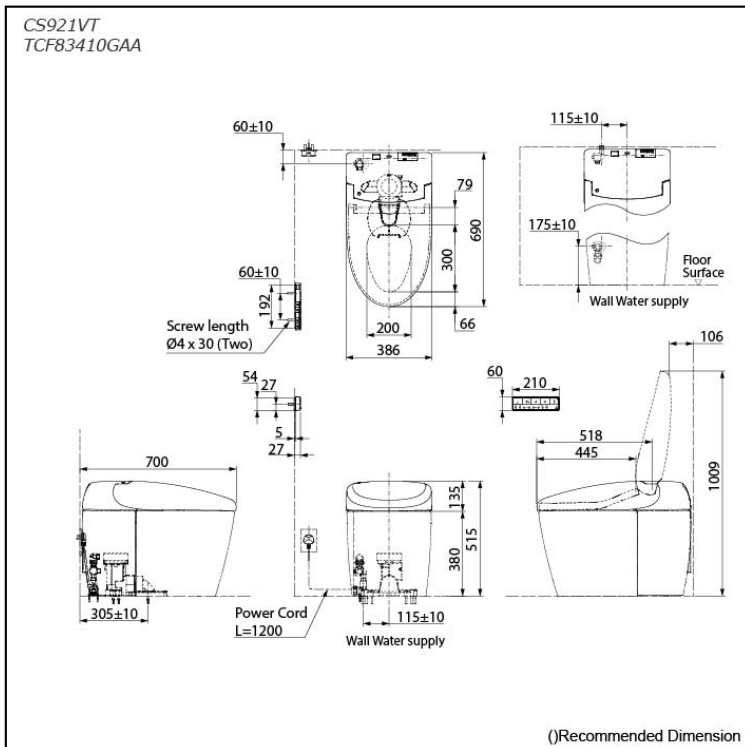## **P**arts description

- **CS921VT**
  Water Closet Bowl (S-Trap) (Rough-in 305)
- **TCF83410GAA**
  WASHLET unit

Optional Parts

- T53P100VR
  Floor Flange

Colors

White (#NW1)

CS921VT
TCF83410GAA

60±10
115±10
79
690
175±10
300
60±10
192
Screw length
Ø4 x 30 (Two)
200
66
386
Floor Surface
Wall Water supply
106
54 27
60 210
5
27
518
445
1009
700
135
515
380
305±10
Power Cord
L=1200
115±10
Wall Water supply
()Recommended Dimension

Important Note

- Do not use other water then allowed by the laws and ordinances of the region of use. Only use portable water.

  Do not use seawater or recycled water.

- This is an electrical product. Do not install it anywhere water is likely to get on the product or anywhere with humidity high enough that water is likely to form on the surface of this product. When using the product in a bathroom, install a fan or ventilation port and ensure good air flow through the bathroom.

- If the controller is not being used over a certain period of time, the batteries in the controller are highly recommended to be removed. Batteries in the remote controller are recommended to be replaced on a yearly basis.

- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

Please consult a TOTO representative for more details